



Sigen Battery

- Premium 314Ah cells with 10,000 cycles, long-lasting & reliable
- 5-layer battery safety protection to define the safety standard
- Battery optimizer inside, mix old and new, upgrade with ease
- Higher energy density, efficient storage, compact design
- 100% depth of discharge, maximum energy utilization

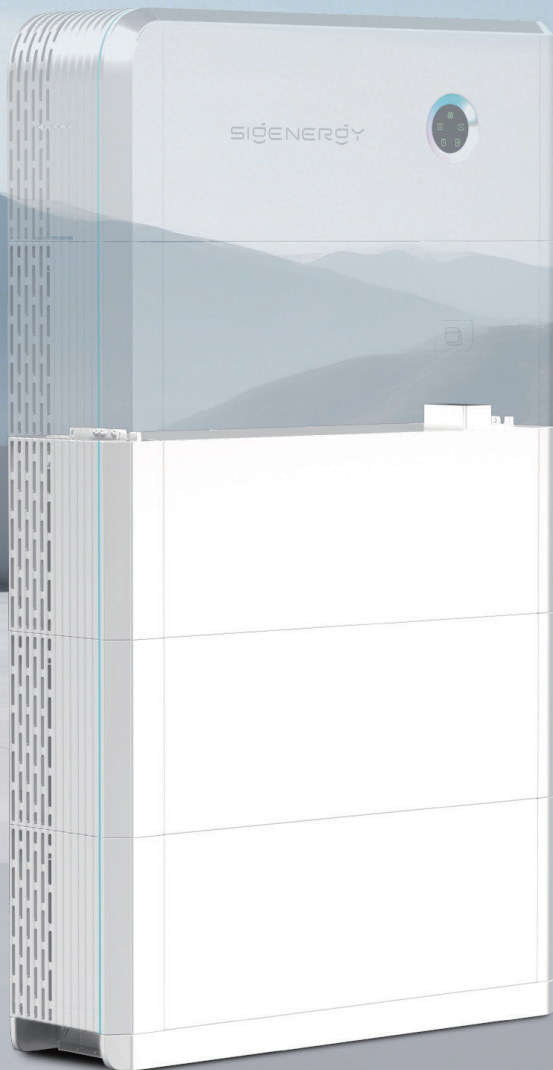

Sigen Battery 6.0 / 10.0

SigenStor BAT	6.0	10.0	Units
Performance Specification			
Battery type	LiFePO4		
Cell capacity	314		Ah
Cycle life ¹	10000		
Total energy capacity	6.02	9.04	kWh
Usable energy capacity ²	5.84	8.76	kWh
Depth of discharge ³	100%		
Max. charge / discharge power	3000	4600	W
Peak charge / discharge power (10 seconds)	4500	6900	W
General Data			
Weight	62	78	kg
Dimensions (W / H / D)	767 / 270 / 265		mm
Storage temperature range	-25 ~ 60		°C
Operating temperature range	-20 ~ 55		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Natural convection		
System ingress protection rating	IP66		
Installation method	Floor standing / Wall-mounted		
Number of modules per controller	1 ~ 6		pcs
Compatible inverters	SigenStor EC series, Sigen Hybrid SP2/TP2 series ⁴		
Standard Compliance			
Standard ⁵	IEC/EN 60730-1, UN 38.3, IEC/EN 62619, IEC/EN 63056, IEC/EN 62477		
	SigenStor BC		
Operating voltage range (Single Phase)	300 ~ 600		V
Operating voltage range (Three Phase)	600 ~ 900		V
Weight	8		kg
Dimensions (W / H / D)	765 / 109 / 260 (without decorative cover)		mm
Compatible battery	SigenStor BAT series		
Compatible inverter	Sigen Hybrid SP2/TP2 series		
Communication	CAN		

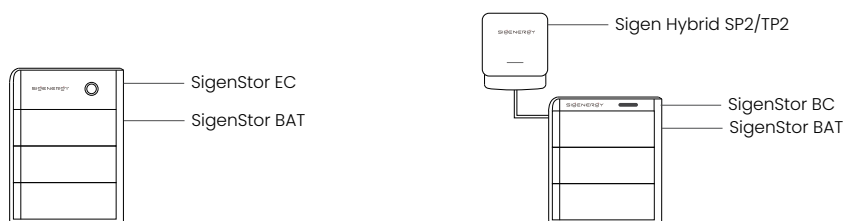

1. This is provided by the battery cell manufacturer. Based on cell test condition of 25±2°C, 0.5C charge and discharge rate and SOH=60%.
2. Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C, at the beginning of life.
3. Refers to the usable energy capacity. Battery must be recharged within 7 days after being fully discharged to keep battery healthy.
4. SigenStor BC must be used if Sigen Hybrid SP2/TP2 is to be connected to the Sigen Battery.
5. For all standards refer to the certificates category on the Sigenergy website.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.

Sigen Energy Gateway HomePro

- Seamless switchover, ensuring 0ms load-side disruption
- Built-in bypass circuit for enhanced system reliability
- Supports diesel generator connection & smart control
- Real-time current monitoring with 100ms zero export
- PV / ESS / grid / generator / V2X, multi-source seamless switching
- Whole-house backup & smart prioritized backup supported

Three phase



Single phase



Sigen Energy Gateway HomePro

Sigen Gateway	HomePro SP	HomePro SP-F	HomePro TP	Units
Grid Connection				
Grid connection type	Single Phase		Three phase	
Nominal AC voltage	220 / 230 / 240		380 / 400	V
Nominal AC current	54.6	100	45.6	A
Nominal AC power	12	22	30	kW
Nominal AC frequency	50 / 60			Hz
Disruption time of backup switch ¹	0			ms
AC Output to Backup Port				
Nominal AC voltage	220 / 230 / 240		380 / 400	V
Nominal AC current	54.6	100	45.6	A
Nominal AC power	12	22	30	kW
Nominal AC frequency	50 / 60			Hz
Overvoltage category	III			
Inverter Connection				
Nominal AC voltage	220 / 230 / 240		380 / 400	V
Nominal AC current	54.6 / 32 ²	55	45.6	A
Nominal AC power	12 / 6 ²	12	30	kW
Smart Port Connection				
Generator output voltage	220 / 230 / 240		380 / 400	V
Nominal current	54.6	55	45.6	A
Nominal AC power	12	12	30	kW
Generator 2-wire start	Supported			
General Data				
Dimensions (W / H / D)	450 / 570 / 197 (without decorative cover)	450 / 695 / 177 (without decorative cover)	450 / 695 / 163	mm
Weight	25 (without decorative cover)	25 (without decorative cover)	25	kg
Storage temperature range	-40 ~ 70			°C
Operating temperature range	-30 ~ 55			°C
Relative humidity range	0% ~ 100%			
Max. operation altitude	4000			m
Cooling	Natural convection			
Ingress protection rating	IP55			
Communication	Fast Ethernet, RS485, dry contact			
Installation method	Wall mounted (Support rear-wiring)	Wall mounted	Wall mounted	

1. This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the backup loads.
2. For Sigen Energy single phase inverter products, 8.0-12.0 kW inverters should be connected to the INV1 port, 3.0-6.0 kW inverters should be connected to the INV2 port. The total power of the inverter cannot exceed 12 kW.
3. This product is only available in specific regions. Please contact Sigen Energy or local distributors for details.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigen Energy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.